

Hur man skapar en Instagram Access Token

1. Logga först in på ditt Instagram konto på webben (www.instagram.com) och gå sedan till <https://www.instagram.com/developer/clients/manage/>

2. Klicka på "Register a New Client". Om du redan har registrerat en client hoppa till steg 4.

Manage Clients

Report Issue

Register a New Client

3. Fyll i egna uppgifter och klicka "Register"

Register new Client ID

Details Security

Application Name:

*Do not use **Instagram**, **IG**, **insta** or **gram** in your app name. Make sure to adhere to the [API Terms of Use and Brand Guidelines](#).*

Description:

Company Name:

Website URL:

Valid redirect URIs:

The redirect_uri specifies where we redirect users after they have chosen whether or not to authenticate your application.

Privacy Policy URL:

Contact email:

An email that Instagram can use to get in touch with you. Please specify a valid email address to be notified of important information about your app.

I'm not a robot



Register

Cancel

4. Klicka sedan på “Manage”

Manage Clients

[Report Issue](#)[Register a New Client](#)

Pool	DELETE	MANAGE
CLIENT INFO		
CLIENT ID	001e89c637f54af384373b0903f9bbc8	
CLIENT STATUS	Sandbox Mode	
Testing app for Pool		

5. Kontrollera att alla uppgifter är korrekta och klicka på “Security fliken”

Manage Client: Pool

Client ID 001e89c637f54af384373b0903f9bbc8

Client Secret e237da93b57b4bdeaedafe130b48a335

[RESET SECRET](#)

Client Status Sandbox Mode

[Details](#)[Security](#)[Sandbox](#)[Permissions](#)[Migrations](#)

Valid redirect URIs:

Press Enter to confirm.

The `redirect_uri` specifies where we redirect users after they have chosen whether or not to authenticate your application.

Disable implicit OAuth:

Disable the Client-Side (Implicit) OAuth flow for web apps. If you check this option, Instagram will better protect your application by only allowing authorization requests that use the Server-Side (Explicit) OAuth flow. The Server-Side flow is considered more secure. See the [Authentication](#) documentation for details.

Enforce signed requests:

Requires the use of your Client Secret to sign all API requests. Use this option to instruct Instagram to check requests for a signature passed in the 'sig' parameter and validate it. This signature is a SHA256 hash of the endpoint and key/value pairs of all parameters for the request, using the Client Secret. If this option is set, calls with mismatched signatures will fail. This technique helps protect your OAuth Client from impersonation attempts from malicious developers. Only enable this option for server-to-server calls. See the [Secure API Requests](#) documentation for details.

[Update Client](#)[Cancel](#)



6. Kryssa ur “Disable implicit OAuth” och klicka “Update Client”

Disable implicit OAuth:

Disable the Client-Side (Implicit) OAuth flow for web apps. If you check this option, Instagram will better protect your application by only allowing authorization requests that use the Server-Side (Explicit) OAuth flow. The Server-Side flow is considered more secure. See the [Authentication](#) documentation for details.

Enforce signed requests:

Requires the use of your Client Secret to sign all API requests. Use this option to instruct Instagram to check requests for a signature passed in the 'sig' parameter and validate it. This signature is a SHA256 hash of the endpoint and key/value pairs of all parameters for the request, using the Client Secret. If this option is set, calls with mismatched signatures will fail. This technique helps protect your OAuth Client from impersonation attempts from malicious developers. Only enable this option for server-to-server calls. See the [Secure API Requests](#) documentation for details.

Update Client

Cancel

7. Kopiera följande url till ett texthanteringsprogram (t.ex. notepad, word).

https://api.instagram.com/oauth/authorize/?client_id=CLIENT-ID&redirect_uri=REDIRECT-URI&response_type=token&scope=public_content

Byt sedan ut CLIENT-ID och REDIRECT-URI (markerat med rött) med värden från din egna Instagram klient.

Exempel på färdig url:

https://api.instagram.com/oauth/authorize/?client_id=001e89c637f54af384373b0903f9bbc8&redirect_uri=http://www.poolpark.fi&response_type=token&scope=public_content

Manage Client: Pool

Client ID

001e89c637f54af384373b0903f9bbc8

Client Secret

e237da93b57b4bdeaedafe130b48a335

RESET SECRET

Client Status

Sandbox Mode

Details

Security

Sandbox

Permissions

Migrations

Valid redirect URIs:

<http://www.poolpark.fi> x


Press Enter to confirm.

The redirect_uri specifies where we redirect users after they have chosen whether or not to authenticate your application.

Disable implicit OAuth:

Disable the Client-Side (Implicit) OAuth flow for web apps. If you check this option, Instagram will better protect your application by only allowing authorization requests that use the Server-Side (Explicit) OAuth flow. The Server-Side flow is considered more secure. See the [Authentication](#) documentation for details.

8. Klistra in url:en du skapat i punkt 7 i adressfältet på webbläsaren och tryck “Enter” på tangentbordet. Klienten måste sedan auktoriseras genom att klicka “Authorize” i rutan som laddas fram.

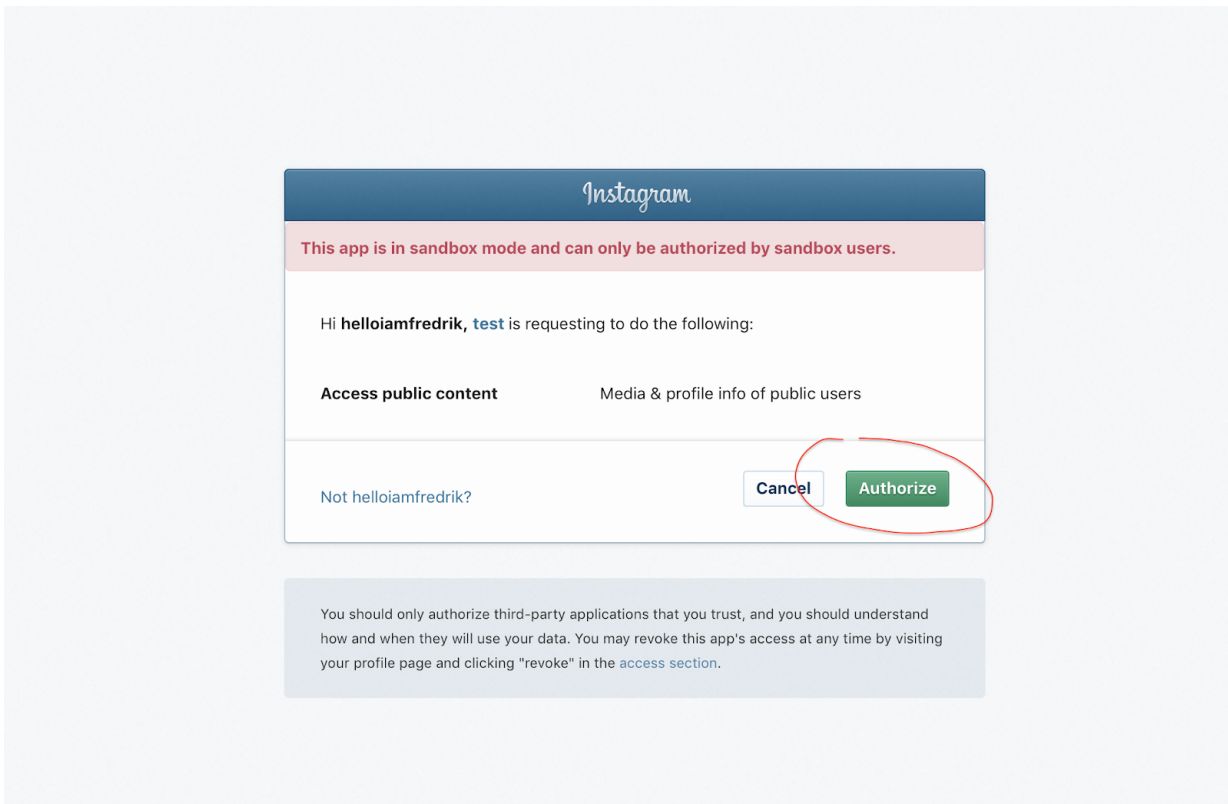

9. När sidan sedan laddas upp kommer url:en i adressfältet att ändras till något som motsvarar url:en nedan:

http://www.poolpark.fi/#access_token=261787861.001e89c.54b7825a072e4e1189b56bd085bcdf55

